

# **Product Specification**

## Single Scissor Lifts

#### Product Code: BZ8130-1P / BZ8130M-1P

Our smallest scissor-action service lift comes in two versions, static and mobile. The mobile version is equipped with two heavy-duty rear castors and a front-end lifting bar to enable quick and easy positioning anywhere in the workshop. The static version is simply fixed to the floor in the required position.

The lifting scissors are supported by a low level cross brace ensuring both platforms are always aligned. Operation is from a single 240V hydraulic control pedestal which can be located anywhere within 3 metres of the platforms. Aimed at tyre shops and workshops with little space, this versatile, compact and simple self-install lift is also popular among home enthusiasts.











### **Product Features**

- ✓ Platforms made from anti-slip chequer plate
- ✓ 4 x maintenance-free hydraulic cylinders
- Drive-up plates can be locked to extend platform length
- ✓ Audible final descent for added foot protection
- Hot-dip galvanized base frame
- Mechanical synchronization
- Drive-on / off from both ends
- ✓ 4 x Hard wearing 20mm raiser blocks

- Emergency lowering function with overload protection
- ✓ Safety pressure relief valve with burst pipe protection
- Protection class IP54, CE-approved, GSapproved, DIN EN 1493
- 2 year warranty
- UK delivery included

BOS0529 v1.2





# Single Scissor Lifts

### **Technical Specifications**

	BZ8130-1P	BZ8130M-1P
Model	Static	Mobile
Capacity	3000 kg	3000 kg
Lifting time (loaded)	30 sec	30 sec
Motor	2.2 kW	2.2 kW
Power Supply	230 V / 50Hz	230 V / 50Hz
Fuse Protection	16 A	16 A

### Measurements (millimetres)

	BZ8130-1P	BZ8130M-1P
Lifting height	950	950
Platform length	1400 - 2030	1400 - 2030
Platform width	450	450
Drive on / over height	105	105






# **Product Specification**

# Single Scissor Lifts

### Schematics BZ8130-1P / BZ8130M-1P

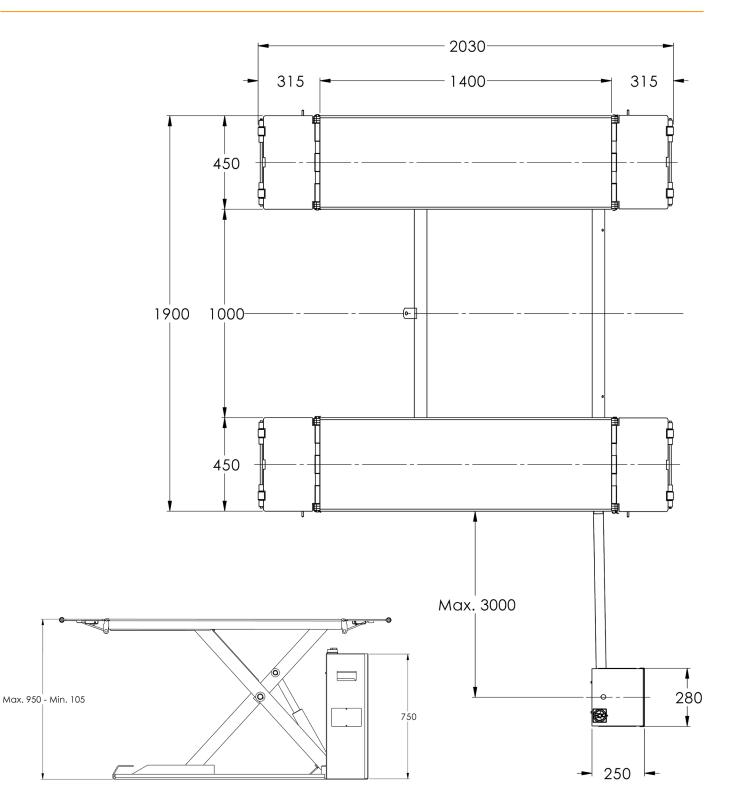

Boston makes every effort to ensure the accuracy of our product drawings and measurements. However, we reserve the right to correct any errors, inaccuracies or omissions and to change or update information at any time without prior notice.

