

Product Specification

4.3T Two Post Vehicle Lift

Product Code BHP243-S

With a hefty 4.3 tonne lifting capacity, our symmetrical BHP243-S is a popular choice with workshops regularly working on SUVs and small to medium size commercial vehicles.

An overhead brace connects the two posts providing strong rigid support and the balance cables ensure perfect synchronisation between the carriages when lifting and lowering.

Each post has its own maintenance-free lifting ram connected directly to the carriage. With extra-low three stage support arms, the BHP243-S is very well suited to low and long wheel-base vehicles. Also included is a convenient 230V power socket at the base of the control panel for connecting power tools or chargers.


With its high specification European construction the BHP243-S is a solid every-day lift for busy workshops. Fully compliant with the latest machinery directive, safety features include locking positions at every 100mm, tapered arm locking mechanisms and dead-man controls.

Options available:

- Tool trays and a range of height extensions
- LED lighting kit
- Also available in neutral grey

Product Features

- ✓ Top brace security stop bar
- Symmetrical post arrangement for extra working space
- ✓ Low profile, three-stage lifting arms
- ✓ Arms can be used with quick drop-in height extensions

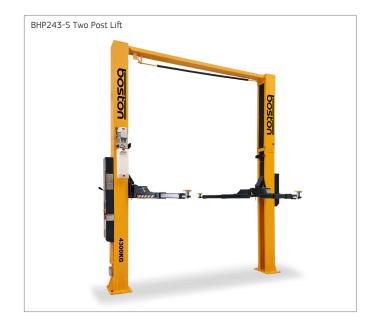









- ✓ Adjustable screw pads (min. height 95mm)
- ✓ Automatic arm locking mechanism
- ✓ Automatic hydraulic safety valve
- ✓ Final descent safety lowering buzzer
- ✓ Dead-man controls
- ✓ 2 year warranty







4.3T Two Post Vehicle Lift

Technical	Specifications
reennear	Specifications

	BHP243-S
Load Capacity	4300 kg
Motor	2.2 kW
Power	3 Phase - 415V / 50Hz / 20A
Lifting / Lowering Time	45s (approx.)

Measurements (millimetres)

	BHP243-S
Lifting Height	1965 mm
Installed Max Height	4250 mm
Installed Max Width (inc. panel covers)	3500 mm
Lifting Arm Extensions (min.)	630 mm
Lifting Arm Extensions (max.)	1245 mm
Miniumum Pad Height	95 mm
Distance Between Columns	2680 mm
Distance Between Carriages	2340 mm
Fixing Plates	390 x 360 mm





Product Specification

4.3T Two Post Vehicle Lift

Schematic BHP243-S

