



Product Model Express Range


Tool free locking device for fast suspension of a variety of services, designed with a keyless release mechanism.

Technical data
supplied by the
manufacturer



Installation & Adjustment

- Ensure a minimum 75 mm of tail wire exit the hanger

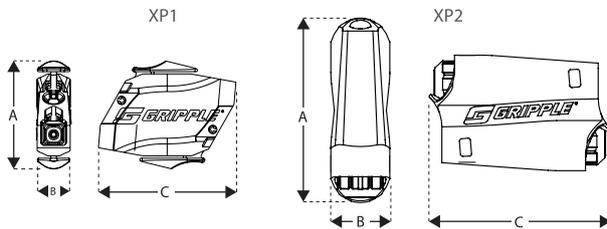

Dimension	No.1 (mm)	No.2 (mm)
Width	18.5	21.4
Depth	5.9	11.6
Length	23.5	28.4

Features / Benefits

- The XP1 is ideal for signage, shopfitting, lighting and other lightweight fixtures
- The XP2 is ideal for mechanical and electrical applications
- Up to six times faster to install than traditional methods
- Keyless; no tool required for adjustment
- Ergonomic buttons allow rapid adjustment
- Discreet and aesthetic design
- Supplied as a ready-to-use kit

Safe Working Load No.1 - 0 - 15 kg @ 5:1 safety factor
No.2 - 0 - 45 kg @ 5:1 safety factor

Material
Housing - Type ZA2 Zinc
Wedge - Sintered steel hardened to min. 56 Rockwell C
Spring - Stainless Steel (Type 302)
End Cap - UV stabilised homopolymer popylene

Remark: This technical data sheet replaces all previous versions. The technical data contained herein is given in good faith and we cannot be held liable for any errors, inaccuracies, omissions or editorial failings. The information detailed in this technical data sheet is given by way of indication and is not exhaustive, users should contact either the seller or the manufacturer of the product for additional technical information concerning its use, if they think the information in their possession needs to be clarified in any way.