

Product Model

Easy Lock




Used to suspend a variety of HVAC, mechanical and electrical services from different substrates.

- Ideal for fast suspension of cable containment, pipework, air conditioning
- Up to six times faster to install than traditional hanging systems
- Versatile and simple to use
- Strong, safe and industry approved
- Aesthetically discreet and lightweight

Technical data
supplied by the
manufacturer




Installation & Adjustment

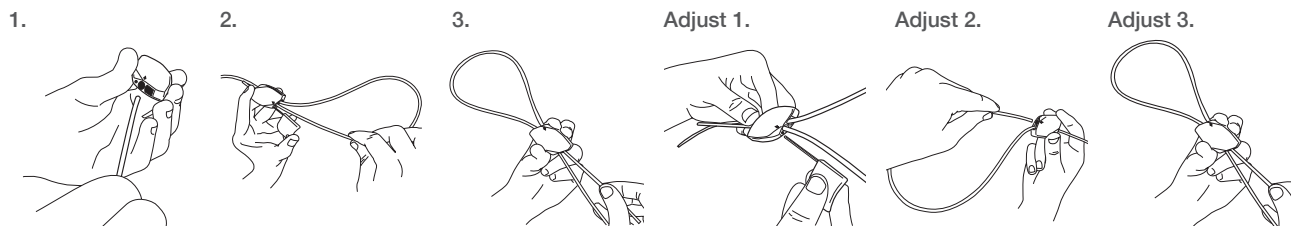

Ensure a minimum 75 mm of tail wire exits the hanger.

Specification

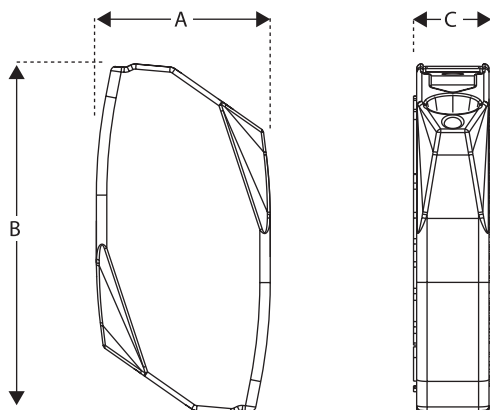

Dimensions	A	B	C
mm	18	34	8

Submittal Information

Length: 100m
Diameter of rope: 2mm
Number of strands: 7
Lay: 7
Finish: Galvanised
Core: SC
Tensile strength of wire: 1770 N/mm²

Test Details

Safe Working Load: 45 kg @ 5:1 safety factor

Material:

Housing - Type ZA2 Zinc

Wedge - Sintered steel hardened to min. 56 Rockwell C

Spring - Stainless Steel (Type 302)

End Cap - UV stabilised homopolymer propylene

Solutions, Service and Supplies to the Trade

Springhead Enterprise Park, Springhead Road, Northfleet, Kent DA11 8HJ

T 01322 274226 F 01322 278178 E sales@fixmart.co.uk www.fixmart.co.uk

