



COMPACT











& CLOUD



# d-COLOR

MF223/MF283

### EFFICIENCY WITHIN EASY REACH

The new **d-Color MF223 and d-Color MF283 Multifunctional Systems** are perfect for anyone looking for **quality technology** at an **affordable price**.

Reliable and simple to use, they satisfy the demands of the modern office with excellent paper capacity (up to 3,600 sheets with optional trays) and modular flexibility for the most demanding of needs. An individual authentication process allows access to up to 1,000 users with web surfing and printing made easy via the practical 7" touch panel. Airprint® and NFC (Near Field Communication) are standard functions and allow mobile devices to connect directly to all functionalities with user authentication and printing.

A special software connector (optional) allows connection to Google Cloud Print™ directly from the touch panel. Finally, the low energy consumption levels allow real cost savings with full eco-compatibility through the use of recycled and recyclable materials



### SPEED PER MINUTE: 22 PAGES (d-Color MF223), 28 PAGES (d-Color MF283) A4 COLOUR & MONO

7" TOUCH PANEL WITH INTUITIVE USER INTERFACE

NFC (NEAR FIELD COMMUNICATION) CONNECTION AREA INTEGRATED IN OPERATOR PANEL

INTEGRATED WEB BROWSER, PRINTING USING AIRPRINT® & GOOGLE CLOUD PRINT™ (option)

PAPER CAPACITY 3,600 SHEETS MAX.

REDUCED ENERGY CONSUMPTION

OCR SCANNING OF "SEARCHABLE PDF" OR MICROSOFT® OFFICE OPTIMISED FILES (option)

**COMPACT DIMENSIONS** 

## d-COLOR MF223/MF283



New 7" Touch Panel with NFC authentication area and optional KP-101 numeric keypad



The d-Color MF283 equipped with a DF-628 Document Feeder, FS-534SD Finisher and PC-214 Trays

#### **FUNCTIONAL AND ROBUST**

The new **d-Color MF223 and d-Color MF283** are **sophisticated** yet **simple-to-use** products. They are particularly suitable for **cost-conscious businesses and integrate seamlessly within** modern offices with their high levels of **reliability and the compatibility with the latest** technology.

#### **ALWAYS CONNECTED**

For convenient direct access, these new Multifunctional Systems are equipped with a **7" touch panel** featuring an **intuitive user interface** similar to that of a PC, tablet or smartphone.

This interface coupled with the standard web browser allows surfing and printing directly from the internet on either model. Printing is also supported by Android devices using NFC (Near Field Communication) technology and iOS devices communicating via Bluetooth® LE (optional). Other types of connection can also be used for printing from devices: Airprint® is provided as standard on both new models, while Google Cloud Print™ compatibility requires the installation of a special software connector.

#### PRACTICAL AND RELIABLE

The d-Color MF223 and d-Color MF283 are designed to handle intense workloads. The standard paper capacity of 1,100 sheets is divided between a 500-sheet A4 tray, a 500-sheet maximum capacity A3 format tray and a 100-sheet by-pass tray for formats from A6 to A3 size. With the optional PC-414 2,500-sheet tray, the paper capacity can be increased to a maximum of 3,600 sheets.

For even greater productivity a **DF-628 originals feeder** can be added to the **d-Color MF223 and d-Color MF283**, for **duplex scanning**. As an alternative to the **3,000-sheet FS-534 lateral finisher**, an **FS-533 500-sheet finisher** can be integrated within these models, with connection provided by the **new RU-514 option**.

Moreover, the FS-534SD finisher allows booklets of up to a maximum of 20 sheets to be produced with centre stapling. To complete the finishing options, a perforator option is available for all finishers.

#### **INSTRUMENTS TO SHARE**

In an ideal working environment it should be possible to share all instruments available in the office.


The d-Color MF223 and d-Color MF283 provide access to up to 1,000 users.

Each user has their own **personal profile** set up by the system administrator determining the functions they can use. **Individual authentication** is possible via the **Touch Panel** using one of the card readers available or the **AU-102 Biometric Reader** (Finger Vein Mapping Recognition.

These new models are also compatible with network authentication based on **Active Directory**.

#### LOW ENVIRONMENTAL IMPACT

Genuine savings are possible through demonstrating true respect for the environment. In fact, the new **d-Color MF223 and d-Color MF283** have **reduced energy consumption levels** in both Sleep Mode and Operating Mode, resulting in one of the lowest TEC (Typical Electricity Consumption) parameter values, and are made of recycled and recyclable materials.

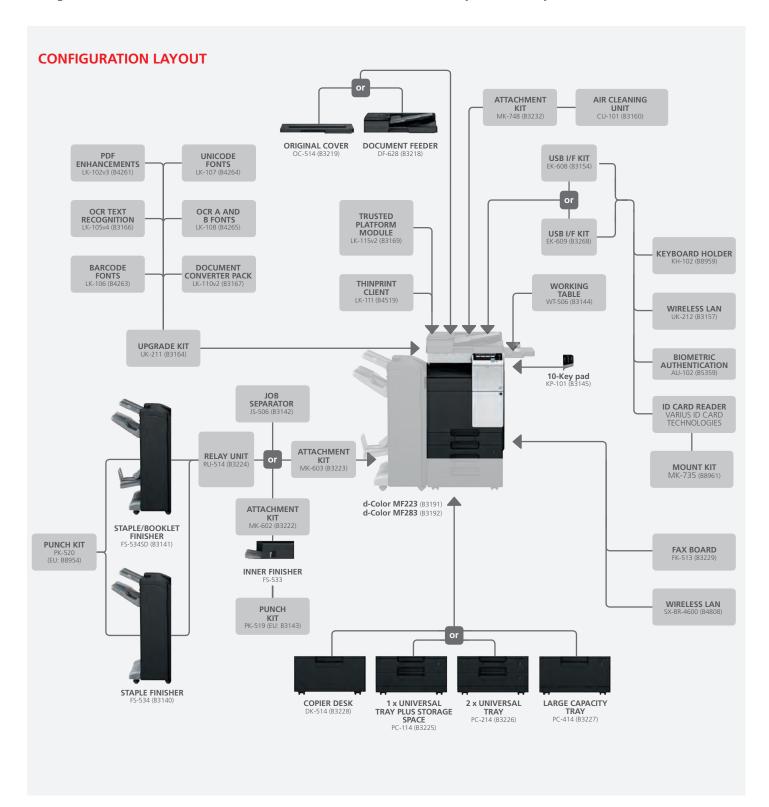

#### **TECHNICAL SPECIFICATIONS**

| GENERAL                         |  |
|---------------------------------|--|
| Type                            | Desktop, Printer/Scanner/Copier            |
| Technology                      | Laser semiconductor, 4 beams               |
| Integrated Duplex Unit          | Paper formats A3-A5 (60-256g/m²)           |
| Copy Format: max./min.          | A3/A6                                      |
| Max. Document Format            | A3   |
| Scanning Resolution             | 600 dpi                                    |
| Copy Resolution                 | 1,800 dpi (equivalent) x 600 dpi           |
| Grey Scale                      | 256 levels                                 |
| Memory Capacity                 | 2 GB standard / 4 GB optional              |
| Hard Disk Capacity              | 250 GB                                     |
| Warm-up Time                    | 20 sec.                                    |
| Time for First Copy in Mono     | 6.8 sec.                                   |
| Time for First Copy in Colour   | 8.4 sec                                    |
| Copying speed Mono & Colour     | d-Color MF223: 22 copies per minute        |
| (A4)                            | d-Color MF283: 28 copies per minute        |
| Zoom                            | 25%-400% in steps of 0.1                   |
| Tray 1 Paper Capacity           | 500 sheets max. with 80g/m², format A4     |
| Tray 2 Paper Capacity           | 500 sheets max. with 80g/m², format A3     |
| By-pass Tray Capacity           | 100 sheets max. with 80g/m², format A3     |
| Trays 1/2 Paper Weight          | 60-256 g/m <sup>2</sup>                    |
| By-pass Tray Paper Weight       | 60-256 g/m <sup>2</sup>                    |
| Max. Paper Capacity with        | 3,600 A4 sheets or 2,100 A3 sheets         |
| Optional Trays                  |  |
| Dimensions & Weight (W x D x H) | Basic unit 585 x 660 x 779 mm, 72kg        |
|                                 | With options (max.) 1,545 x 786 x 1,160 mm |
| Power Supply                    | 220-240V, 8.0A, (50-60Hz)                  |
| Power Consumption               | Max. 1,500W                                |
|                                 | Sleep mode d-Color MF223: 0.8W             |
|                                 | Sleep mode d-Color MF283: 0.5W             |
| TEC (Total Electricity          | d-Color MF223: 0.994 kWh/week              |
| Consumption)                    | d-Color MF283: 1.337 kWh/week              |

| PRINTER             |   |
|---------------------|---|
| CPU                 | ARM Coretex Dual-core 1.2GHz                        |
| Memory              | Shared with copy function                           |
| Printing Speed Mono | d-Color MF223: 22 copies per minute                 |
| & Colour (A4)       | d-Color MF283: 28 copies per minute                 |
| Hard Disk           | Shared with copy function                           |
| Printing Resolution | 1,800 dpi x 600 dpi equivalent                      |
| PDL                 | PCL 6 (PCL5c + XL 3.0), PostScript 3 Emulation, XPS |
| Protocols           | TCP/IP (IPv4, IPv6), IPX/SPX, SMB (NetBEUI), LPD,   |
|                     | IPP1.1, SNM P, HTTP                                 |
| Operating Systems   | Windows Vista / 7 / 8 / 8.1, 10 (each 32/64 bit);   |
|                     | Windows Server 2008 / 2008 R2 / 2012 / 2012 R2;     |
|                     | Mac OS X (10.6 / 10.7 / 10.8 / 10.9 / 10.10), Linux |
| PCL Fonts           | 80 outline fonts                                    |
| PostScript 3 Fonts  | 137 outline fonts                                   |
| Interfaces          | Ethernet (10-Base-T/100-Base-TX/1,000-Base-T),      |
|                     | USB 2.0, IEEE 802.11 b/g/n (optional UK-212),       |
|                     | Bluetooth® LE (optional EK-609)                     |

| SCANNING   |  |
|--|--|
| Туре   | Colour Scanner   |
| Interfaces   | Ethernet (10-Base-T/100-Base-TX/1000-Base-T);<br>IEEE 802.11 b/g/n (optional)  |
| Driver   | TWAIN driver, HDD TWAIN driver   |
| Protocols  | TCP/IP (FTP, SMB, SMTP)  |
| Scanning Speed (Colour & Mono, 300 dpi, A4, simplex) | Up to 45 ipm (with Document Feeder)  |
| Max. Scanning Format                                 | A3 (with Document Feeder), or 297 x 431.8 from the Platen Glass  |
| Output Formats                                       | TIFF, JPEG, PDF, Compact PDF, XPS, Compact XPS, PPTX, .XSLX, .DOCX (opt.), Searchable PDF (opt.), PDF/A (opt.), Linearised PDF (opt.)      |
| Scanning Resolution                                  | 600 x 600 dpi max.   |
| Main Functions                                       | Scan-to-E-Mail, Scan-to-Me, Scan-to-SMB,<br>Scan-to- Home, Scan-to-FTP, Scan-to-Box,<br>Scan-to-USB, Network TWAIN scan,<br>Scan-to-WebDAV |

| Communications             | Super G3                                     |
|----------------------------|--|
| Super G3 Fax Interface     | Public Switched Telephone Network, PBX       |
| Modem Speed                | 33.6 kbps with Automatic Fall Back           |
| Compression                | MH / MR / MMR /JBIG                          |
| Max. Transmission Format   | A3 max.                                      |
| Max. Reception Format      | A3 max.                                      |
| Transmission Time per Page | Less than 3 sec. (A4, V.34, 33.6 kbps, JBIG) |
| Agenda with Abbreviated    | Up to 2,000 numbers                          |
| Numbers                    |  |
| i-Fax Protocol             | TX: SMTP; RX: POP3, TCP/IP                   |
| IP-Fax Interface           | Ethernet (10-Base-T/100-Base-TX/1000-Base-T) |
| Fax Internet Format        | TIFF   |

| DF-628                     | Automatic Duplex Document Feeder                            |
|----------------------------|---|
| DF-026                     | Capacity up to 100 sheets 80g/m <sup>2</sup>                |
|                            | Max. paper format A3  |
|                            | Original weights 35-128 g/m² (simplex reading only)         |
|                            | Original weights 50-128 g/m² (duplex/mix mode reading)      |
| OC-511                     | Basic Platen Glass Cover                                    |
| PC-114                     | 1 x 500 A3/A5 sheet tray (80g/m²), paper weight 60-256 g/m² |
| PC-214                     | 2 x 500 A3/A5 sheet tray (80g/m²), paper weight 60-256 g/m² |
| PC-414                     | 1 x 2,500 A4 Sheet Tray (80g/m²), paper weight 60-256 g/m²  |
| HT-509                     | Heater for Paper Trays                                      |
| MK-734                     | Mount Kit for Heater HT-509                                 |
| DK-514                     | Copy Desk (metal)   |
| FS-533                     | Integrated Staple Finisher up to 500 sheets capacity        |
| PK-519                     | 2 or 4-Hole Punch Unit for FS-533 finisher                  |
| FS-534                     | External Staple Finisher for up to 3,000 sheets             |
| FS-534SD                   | External Staple Finisher/Booklet & Tri-fold                 |
|                            | Up to 2,000 sheets capacity, including Tri-fold and         |
|                            | Centre-staple function for Booklets                         |
| RU-514                     | Mandatory Bridge Unit to connect FS-534                     |
|                            | and FS-534SD Finishers                                      |
| MK-602                     | Mandatory for connecting Finisher FS-533                    |
| MK-603                     | Mandatory to connect Finishers FS-533,                      |
|                            | FS-534 & FS-534SD   |
| PK-520                     | 2 or 4-Hole Punch Unit for FS-534 / SD Finishers            |
| JS-506                     | Job Separation Tray to be used in place of Finishers        |
|                            | for offset group/sort                                       |
| AU-102                     | Biometric Authentication Kit                                |
| USB Authentication Units   | Card Reader CRv2 Unique 125kHz                              |
|                            | Card Reader CRv2 ASK SFK 125kHz                             |
|                            | Card Reader CRv2 Multi-reader HF 13.56MHz                   |
| MK-735                     | Mount Kit for internal Card Reader installation             |
| SX-BR-4600                 | WLAN Connection Kit   |
| UK-212                     | WLAN Access Point   |
| KH-102                     | External Keyboard Holder                                    |
| EK-608                     | USB Interface Kit for External Keyboard                     |
| EK-609                     | USB + Bluetooth for connecting Mobile devices               |
| SC-508                     | Security Copy Guard Kit                                     |
| i-Option                   | LK-102v3: PDF encryption, PDF/A 1b                          |
|                            | LK-105v4: OCR searchable, PPTX                              |
|                            | LK-106: Barcode font printing                               |
|                            | LK-107: Unicode font printing                               |
|                            | LK-108: OCR font printing                                   |
|                            | LK-110v2: DOCX, XLXS and PDF/A format generation            |
|                            | LK-111: Native ThinPrint client                             |
|                            | LK-115v2: Trusted Platform Module                           |
|                            | 2GB Memory Kit for i-Option                                 |
|                            |   |
| CU-101                     | Cleaning filter to improve indoor air quality               |
| UK-211<br>CU-101<br>MK-748 | Mandatory to install CU-101                                 |
| CU-101                     |   |

| d-Color MF223/d-Color MF283 CONSUMABLES           |  |  |
|---|--|--|
| Black Toner<br>Colour Toner                       | Capacity up to 24,000 pages (cover 5%) (B1194) Capacity per colour up to 21,000 pages (cover 5%) Cyan (B1195), Magenta (B1196), Yellow (B1197) |  |
| Black Drum  | Capacity on d-Color MF223 up to 80,000 pages (B1198)<br>Capacity on d-Color MF283 up to 105,000 pages (B1198)                                  |  |
| Black Developer Unit                              | Life up to 600,000 pages (B1199)   |  |
| Colour Imaging Units<br>(One required per colour) | Capacity on d-Color MF223 up to 70,000 pages<br>Capacity on d-Color MF283 up to 90,000 pages<br>Cyan (B1200), Magenta (B1201), Yellow (B1202)  |  |
| Waste Toner Box WX-105                            | Capacity approx. 22,000 printouts (B1203)  |  |
| Fuser Kit   | Life up to 500,000 pages (B1204)   |  |
| Transfer Unit Kit                                 | Life 250,000 pages (B1205)   |  |
| Staple cartridge SK-602                           | 3 sets - 5,000 staples each  |  |

Performance refers to an appropriate use of the product under optimal conditions. Right reserved to change the technical specifications. The trademark Bluetooth® LE belongs to Bluetooth SIG, Inc: the other registered trademarks belong to their respective owners. The d-Color MF223/d-Color MF223 are distributed by Olivetti S.p.A.

(03/16) - Code: 49473-00





