



Specifications

Model	600-I	690-I
Capacity	1/8" to 1 1/4"	1/8" to 2"
Motor	Universal, Single Phase	
Watts and Voltage	1020 W (230 V) and 1270 W (115 V)	
Operating Speed	36 RPM (230 V) and 32 RPM (115 V)	
Controls	Heavy-Duty Paddle Switch with Safety Lock-Off Device (Automatically locks off when released). Separate FORWARD/REVERSE Switch.	
Gear Housing	Die Cast Aluminium.	
Gear Head	All Shafts, Ball and Needle Bearing Mounted. Permanently Lubricated Gear Housing.	
Body & Handle	Durable Heavy-Duty Fiberglass Reinforced Plastic.	
Length	51 cm	61 cm
Weight	5,7 kg	9,6 kg

Ordering Information



Catalog No.	Description 600-I	Weight kg	Catalog No.	Description 690-I	Weight kg
44883	230 V Machine Only	5,7	44953	230 V Machine Only	9,6
44888	115 V Machine Only	5,7	44948	115 V Machine Only	9,6
44898	230 V Machine Only (Switzerland Only)	5,7	44958	230 V Machine Only (Switzerland Only)	9,6
44878	230 V 1/2 - 1 1/4" with Support Arm and Carrying Case	14,7	44933	230 V 1/2 - 2" with Support Arm and Carrying Case	26
44903	230 V 1/2 - 1 1/4" with Support Arm and Carrying Case (Switzerland Only)	14,7	44938	230 V 1/2 - 2" with Support Arm and Carrying Case (Switzerland Only)	26
44893	115 V 1/2 - 1 1/4" with Support Arm and Carrying Case	14,7	44943	115 V 1/2 - 2" with Support Arm and Carrying Case	26

Dies

(BSPT) British Standard Pipe Taper	1/8 - 28	1/4 - 19	3/8 - 19	1/2 - 14	3/4 - 14	1 - 11	1 1/4 - 11	1 1/2 - 11	2 - 11
Black Oxide RH	45848	45853	45858	45863	45868	45873	45878	45883	45888


Accessories

Catalog No.	Description	Weight kg
46668	Carrying Case 600-I	5,5
45923	Model 602 Support Arm for 600-I	1,8
46673	Carrying Case 690-I	5,5
45928	Model 692 Support Arm for 690-I	3,4



SCAN & LEARN

DISTRIBUTOR

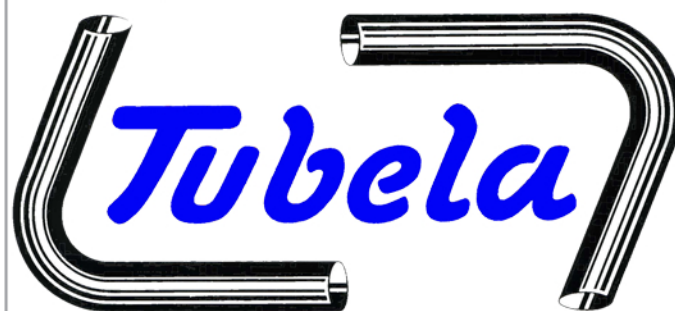

For the complete selection of the RIDGID® product line, please refer to the RIDGID Catalog or www.RIDGID.eu.