



TECHNICAL DATA SHEET


PermaPaper® HPI Adhere PP Gloss S/A Labels Permanent Solidback

PRODUCT/DESCRIPTION/BENEFITS

FACE : Gloss white top coated polypropylene.

ADHESIVE : Acrylic permanent adhesive featuring high clarity and cohesion with strong adhesion to polar and apolar substrates (like PE and PP).

LINER : One-side coated kraft release liner with excellent stability and performance at sheet-to-sheet digital printers.

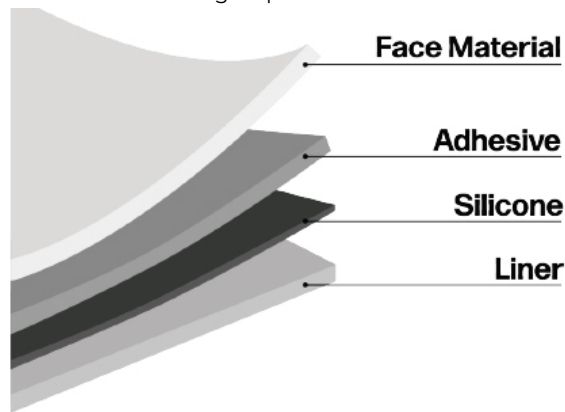

TYPICAL USE

- Beverage
- Home & Personal Care
- Prime Labelling

PRINTING & CONVERTING

Suitable for INDIGO digital printing. Testing for suitability between media, printers and inks is always recommended prior to use.

PRODUCT RECOMMENDATIONS

Promotional and marking labels, point of sale advertising. Theme stickers. For applications on rigid or semi-rigid polythene and polypropylene where an alternative to PVC is required.

SHELF LIFE

2 years in original closed packaging, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH). Prolonged storage at higher temperatures and/or humidity levels will shorten the shelf life of the product.

TYPICAL VALUES

FACE MATERIAL PP DIGITAL GLOSS WHITE PP61		
Grammage	55 g/m ²	ISO 536
Thickness	58 µm	ISO 534-80
Finishing	Gloss White	
ADHESIVE PERMANENT P21		
Tack Glass	8 N	FTM9
Min Labelling temperature	-5 °C	
Usage Temperature	-40/+80 °C	
Peel Value Glass-24 hours	7 N/25mm	FTM2
LINER 120G WHITE KRAFT		
Grammage	120 g/m ²	ISO 536
Thickness	113 µm	ISO 534-80

DISCLAIMER

The information on physico-chemical characteristics and values in this document is based on tests we believe to be reliable, but it is provided without guarantee and does not constitute a warranty. It is intended solely for informational purposes. Purchasers should independently determine the suitability of this material for their specific use prior to application. All technical data are subject to change without notice. All PermaPaper® products are sold in accordance with the applicable terms and conditions of sale. For further information, please contact your PermaPaper® sales representative.