SITE:	Sample
DRAWING NO. :	Smallest building requirement with B443-440
DESCRIPTION:	Class 4 Recessed DO/RO

IMPORTANT NOTE

DIMENSIONS GIVEN APPLY ONLY TO EQUIPMENT MODELS LISTED ON THIS DRAWING. OTHER BRANDS CAN VARY CONSIDERABLY AND WILL REQUIRE NEW DRAWINGS TO SCALE FOR VOSA APPROVAL. IT CONTRAVENES BOSTON COPYRIGHT TO USE THIS DRAWING EXCEPT FOR THE PURPOSE OF LAYOUT AND APPROVAL OF BOSTON EQUIPMENT

EQUIPMENT LIST:-

B443-440 Boston 4 tonne 4 post ramp
PD303s Boston hydraulic play detector
BJB20 Boston 2 tonne jacking beam
D412 Boston Class 4 Brake tester
B501 Boston beam setter
EM6T Boston combined emissions

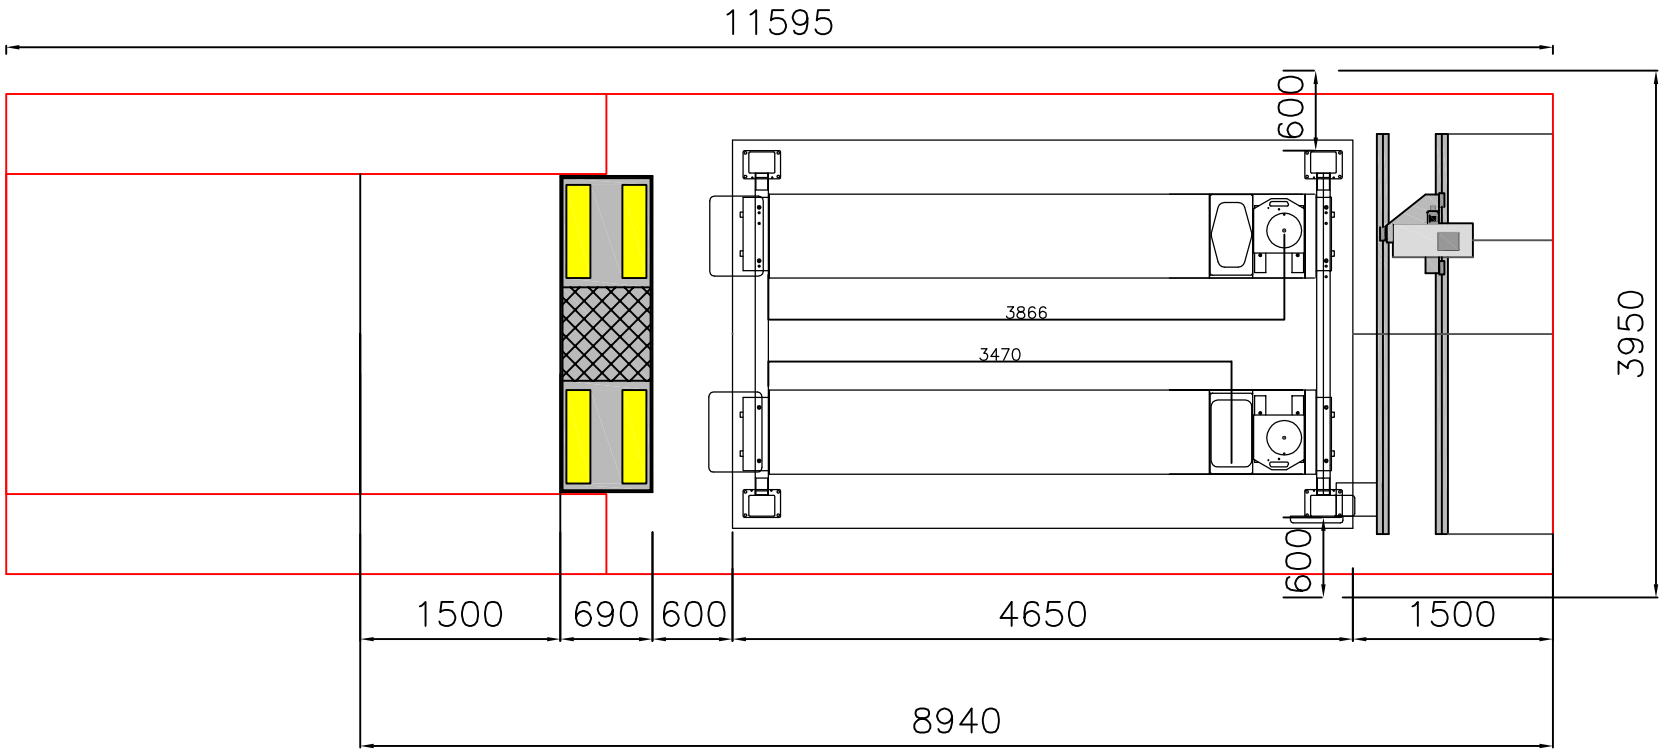

DOCUMENT: BOS0700

NOTES:- (Class 4) Roof height must be 2.4m or higher, except over lift where it must be 3.8m or higher above fully lowered platforms. Headroom is measured 500mm ahead of ramp, 1000mm to rear of ramp and 500mm out from the outside edges of platforms.
Inspection pit to have at least 3.9m of clear working length and be at least 1.5m deep and not deeper than 1.8m.
Vehicle entrance / exit must be 2.4m high and 2.4m wide. Brake testing standing area must be flat and level for 3.35m from centre line of brake tester the remainder must not exceed 10% gradient.
Minimum clearance of 600mm around all parts of the ramp.

Boston Garage Equipment, Beckingham Business Park, Tolleshunt Major
Essex, CM9 8Z, United Kingdom
T: +44 (0)1708 525 585 F: +44 (0)1708 525 408 info@boston-ge.com www.boston-ge.com