

7T Twin Ram Hydraulic Two Post Lift

Product Code
BH270

The BH270 is the largest hydraulic lift in our two post range with an impressive 3.2m distance between the posts. Its ample 7T lifting capacity makes light work of Lutons, Sprinters, flat-beds, 4x4s and LCVs.

Its overhead brace provides sturdy support while the balance cables ensure perfect synchronisation. Lifting rams are fitted to both posts and are connected directly to the carriages which provide a surprisingly low 140mm minimum pad height making this a very versatile lift.



Product Features

Standard Features

- ✓ Top brace security stop bar
- ✓ Symmetrical post arrangement for extra working space
- ✓ Low three-stage lifting arms
- ✓ Arms can be used with quick drop-in height extensions
- ✓ Adjustable screw pads (min. height 140mm)
- ✓ Automatic arm locking mechanism
- ✓ Automatic hydraulic safety check valve
- ✓ Additional mechanical lock safety system
- ✓ Dead man controls

Optional Features

- ✓ A range of specific pad height extensions (please enquire)
- ✓ Also available in 230V Single phase

7T Twin Ram Hydraulic Two Post Lift

Technical Specifications



	BH270
Load capacity	5000 kg
Motor	3 kW
Power	230V or 400V / 50Hz / 20A
Lifting / lowering time	44 / 42 sec

Measurements (millimetres)

	BH270
Lifting height	2000
Installed max height	5115
Installed max width	3890
Long arm extension (min)	896 (triple ext.)
Long arm extension (max)	1824 (triple ext.)
Short arm extension (min)	N/A
Short arm extension (max)	N/A
Minimum pad height	140
Distance between columns	3250

7T Twin Ram Hydraulic Two Post Lift

Schematics BH270

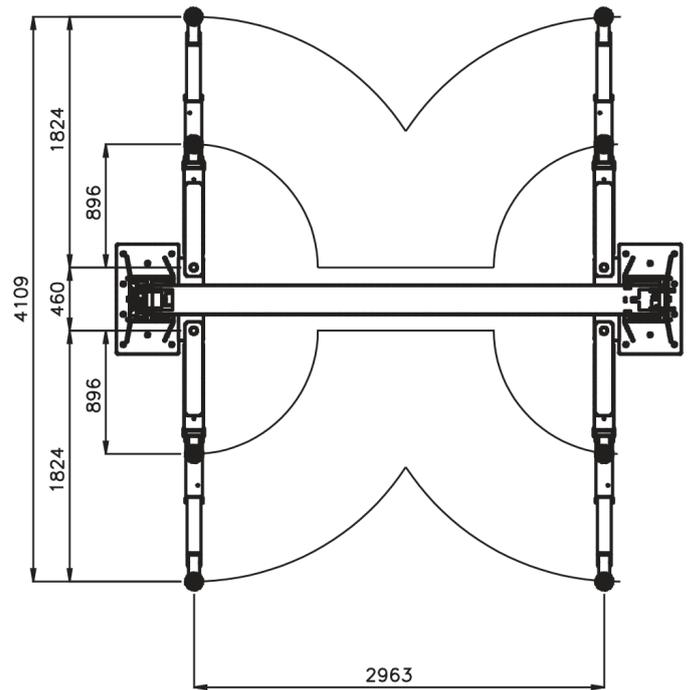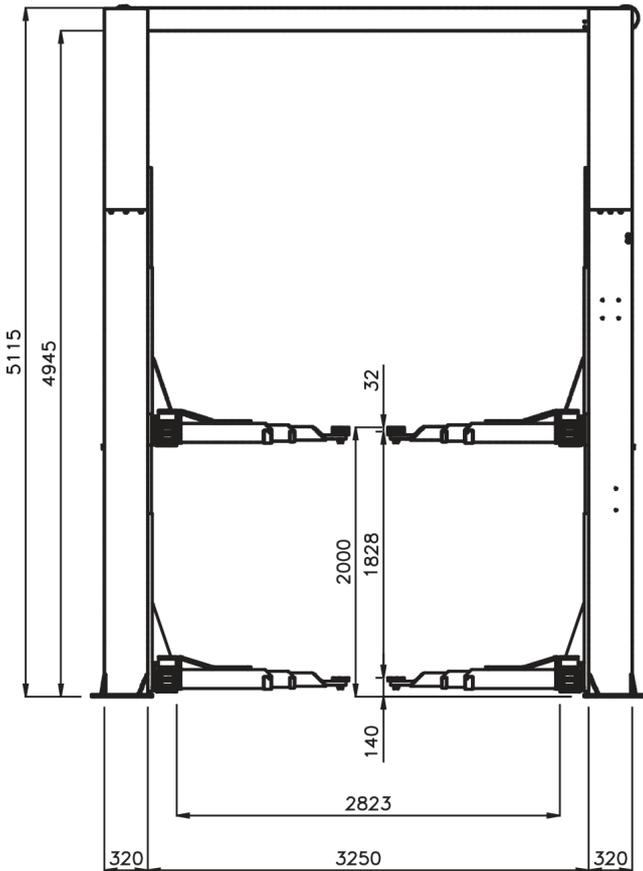

Boston makes every effort to ensure the accuracy of our product drawings and measurements. However, we reserve the right to correct any errors, inaccuracies or omissions and to change or update information at any time without prior notice.